

SELECT®**Residential Electric Water Heaters**

Tall, Short and Lowboy models available.

Self-Cleaning Diffuser Dip Tube - Helps reduce lime and sediment buildup, maximizes hot water output. Made of State PEXAN™, a cross-linked PEX polymer that can withstand long-term exposure to water temperatures up to 400°F.

Aluminum Anode Rod - Helps protect against corrosion for longer tank life.

Durable, Tamper-Resistant Brass Drain Valve

Glasslined Tank - For long-lasting protection against corrosion.

CSA Certified and ASME Rated T&P Relief Valve - Factory intalled, side-mounted most models. Top-mounted T&P available as option on select models.

Code Compliance - Meets the Federal Energy Efficiency Standards effective January 20, 2004, according to the National Appliance Energy Conservation Act (NAECA) of 1992. And also meets the standby loss requirements of the U.S. Department of Energy and Current Edition of ASHRAE/IESNA 90.1 and ICC and HUD Standards.

6-Year Limited Tank and Parts Warranty - Upgrade tank warranty to 10 years. See detaild on page 2.



Low Lead Content



LISTED

For more information on Select® contact:
State Water Heaters
500 Tennessee Waltz Parkway, Ashland City, TN 37015
800-365-0024 Toll-free USA
www.statewaterheaters.com

SOLID.STATE.

SELECT®

Residential Electric Water Heaters



MODEL NUMBER	SERIES	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GALLON CAPACITY	ELEMENT WATTAGE 240 VAC		RECOVERY 90°F RISE	R VALUE	DIMENSIONS IN INCHES			APPROX. SHIPPING WEIGHT (LBS)
					STANDARD	MAXIMUM			A HEIGHT	B DIAMETER	C	
TALL MODELS												
ES6 30 DORT	200	43	.93	30	4500	6000	21	16	46-1/2	18	39-1/2	90
ES6 40 DORT	200	52	.92	40	4500	6000	21	16	59-1/2	18	53-1/2	106
ES6 52 DORT	210	60	.91	50	4500	6000	21	16	54	20	47-1/2	116
ES6 55 DORT	210	67	.90	55	4500	6000	21	16	60-1/4	20	52-3/4	134
ES6 66 DORT	210	72	.88	66	4500	6000	21	16	60-1/4	20-1/2	53	178
ES6 80 DORT	210	81	.86	80	4500	6000	21	16	60-1/2	22-1/2	52	208
ES6 120 DORT *	200	112	.81	119	4500	6000	21	16	64-1/4	28	54-1/4	336
SHORT MODELS												
ES6 30 DORS	200	43	.93	30	4500	6000	21	16	36-1/2	20-1/2	28	90
ES6 40 DORS	200	52	.92	40	4500	6000	21	16	44	20-1/2	37-3/4	103
ES6 50 DORS	210	62	.90	50	4500	6000	21	16	48	21-1/2	40-1/2	121
LOWBOY MODELS												
ES6 30 DOLS	200	41	.93	30	4500	6000	21	16	30	22	22-1/2	91
ES6 30 DOLBS**	100	40	.93	28	4500	6000	21	13	30	20	22-1/2	90
ES6 40 DOLNS	200	48	.92	38	4500	6000	21	12	31-1/4	23	24-5/8	113
ES6 40 DOLBS**	200	48	.93	38	4500	6000	21	16	32-1/4	24	24-5/8	118
ES6 50 DOLS	200	55	.91	50	4500	6000	21	16	34	26-1/2	25	164

Recoveries are rounded to nearest gallon


Water Connections - 3/4" on all models

For 10-Year Tank Warranty, change "6" to "X" in Model Number (ESX 40 DORT)

*This model is not available with top-mounted T&P Valve

10-Year Tank Warranty and top T&P Valve option combo not available on ES6 40 DOLNS, ES6 50 DOLS, ES6 40 DOLBS and ES6 30 DOLBS

**Heater ships with supplied insulation blanket; top-mounted T&P Valve not available

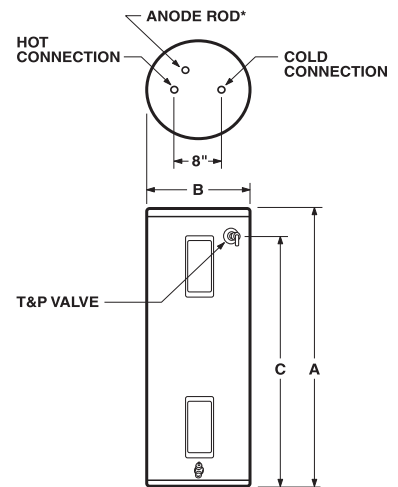

*Location for optional top-mounted T&P Valve, if available and ordered from factory.

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For more information on Select® contact:
 State Water Heaters
 500 Tennessee Waltz Parkway, Ashland City, TN 37015
 800-365-0024 Toll-free USA
 www.statewaterheaters.com

SOLID.STATE.

