



COMMERCIAL-GRADE RESIDENTIAL GAS WATER HEATERS

PROLINE® XE NON-CONDENSING ULTRA-LOW NOx POWER VENT

POWER VENTING MADE SIMPLE

- Thru-the-Wall or Thru-the-Roof power venting using either 2" or 3" ABS, PVC, or CPVC vent pipe
- Combined horizontal and vertical vent runs up to 120 equivalent feet with 3" diameter venting (ABS, PVC, or CPVC)

INTELLI-VENT™* GAS CONTROL

- Advanced electronics for more precise control of water temperature and easy to understand system diagnostics

QUIET AND EFFICIENT BLOWER

- Factory-installed 6-foot power cord with standard 3-prong male connector provided. Electrical requirements; 110/120 VAC power source less than 5 amp draw.

DURABLE, ULTRA-LOW NOx BURNER CONSTRUCTION

- Components of the burner system are made of a strong inconel alloy and stainless steel that is designed to withstand high temperature applications. All burner components have undergone rigorous reliability testing to ensure long life.

COMBINATION THERMOSTAT/ECO

- Utilizes an intermittent ignition gas valve (no standing pilot) with thermistor temperature sensor and built-in high temperature cut off

DYNACLEAN™ DIP TUBE

- Helps reduce lime and sediment buildup, maximizes hot water output. Made from long-lasting PEX cross-linked polymer

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods

FVIR COMPLIANT

- Equipped with a flame arrestor that provides smooth ignition and ensures that in the event of accidental exposure to flammable vapors, that vapors are safely combusted inside the sealed chamber

CODE COMPLIANCE

- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended
- All models are certified at 300 psi test pressure and 150 psi working pressure

6-YEAR LIMITED TANK & PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com

*Intelli-Vent™ is a registered trademark of Emerson Electric Company



SOLID. STATE.





COMMERCIAL-GRADE

RESIDENTIAL GAS WATER HEATERS

Model Number	Gallon Capacity	First Hour Rating Gallon Per Hour	UEF	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Gallon Per Hour	Dimensions in Inches						Approx. Shipping Weight (lbs)
						A	B	C	D	E	Draft Hood	
GS6 40 UBVT	40	76	0.70	42.6	42,000	20	66-7/8	58-5/8	51-1/2	12-1/4	2 or 3	170
GS6 50 UBVT	50	71	0.65	42.6	42,000	22	65-5/8	57-7/16	51	12-1/4	2 or 3	207


Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

All dimensions shown in inches.


Top inlet and outlet are on 8" centers.

Operates on Natural Gas only

Model Number	Maximum Vent Length Eq. ft.		
	2"	3"	4"
GS6-40-UBVIT	40	120	N/A
GS6-50-UBVIT	40	120	N/A

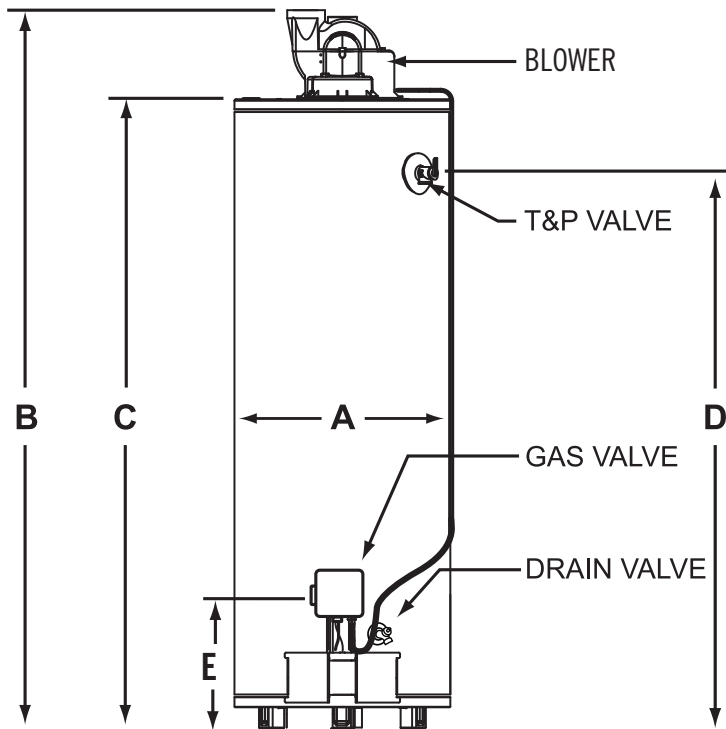

Top View

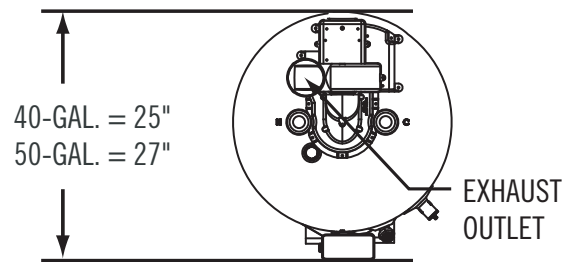

FOR MORE INFORMATION CONTACT: STATE WATER HEATERS 500 TENNESSEE WALTZ PARKWAY, ASHLAND CITY, TN 37015 • 800-365-0024 TOLL-FREE USA • STATEWATERHEATERS.COM