## GEOTHERMAL STORAGE TANKS





**Energy-Efficient Electric Booster Tanks**, available in 80 or 119-gallon capacities, are specifically designed to meet the need for consistent water temperature and constant hot water supply, 24 hours a day!

Sandhog Low-Watt
Density 4500-watt
Incoloy Steel Heating
Element - Designed to last 2 to
3 times longer than standard copper
heating elements

1" Top or 1.5"
Side Recirculating
Connections - For maximum installation flexibility, piping for outgoing water (to geothermal system) and incoming water (from geothermal system) can be connected through the top or side of the tank. Shipped with side connections plugged.

**Diffuser Dip Tube -**Reduces lime and sediment buildup,

maximizes hot water output. Made from State PEXAN™, a cross-linked polymer that can withstand long-term exposure to temperatures up to 400°F.

Glasslined Tank with Two Anode Rods - Primary and secondary aluminum anode rods provide maximum protection against corrosion

2"-Thick (R-16) Foam Insulation for High Energy-Efficiency

**Durable Brass Tamper- Resistant Drain Valve** 

Factory-Installed Temperature and Pressure (T&P) Relief Valve

Certified to UL 174 for Household Electric Water Heaters

**6-Year Limited Tank and Parts Warranty -** Consult
written warranty or contact State
Water Heaters for complete
information

For more information on the Geothermal Storage Tanks contact: State Water Heaters

500 Tennessee Waltz Parkway, Ashland City, TN 37015

800 365-0024 Toll-free USA www.statewaterheaters.com

SOLID.STATE.




## GEOTHERMAL STORAGE TANKS



MODEL Number	GALLON CAPACITY	ELEMENT WATTAGE (240 VOLT)	RECOVERY 90°F RISE GALLONS PER HOUR	NUMBER OF ELEMENTS	R Value	DIMENSIONS IN INCHES		APPROX.
						HEIGHT	DIAMETER	SHIPPING WEIGHT (POUNDS)
SGV 82 10TS	80	4500	21	1	16	63-1/4	24	204
SGV 120 10TS	119	4500	21	1	16	63-1/4	28	311

Recovery capacity is based on actual performance tests.

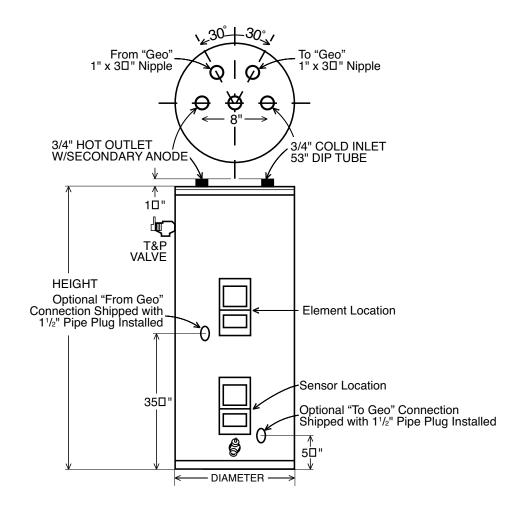

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For more information on the Geothermal Storage Tanks contact: State Water Heaters 500 Tennessee Waltz Parkway, Ashland City, TN 37015

800 365-0024 Toll-free USA
www.statewaterheaters.com

SOLID. STATE

