

SELECT®

Residential Gas Water Heaters



State Select® gas water heaters are FVIR compliant, which meets the ANSI Z21.10.1-CSA 4.1 standards for flammable vapor ignition resistance.



Dynaclean™ Diffuser Dip Tube

Helps reduce lime and sediment buildup, maximizes hot water output. Made from long-lasting PEX cross-link polymer.

Built Using Proven FVIR Technology

Equipped with a flame arrestor that provides smooth ignition and ensures that in the event of accidental exposure to flammable vapors, the vapors are safely combusted inside the sealed chamber.

Diffuser Dip Tube

- Reduces lime and sediment buildup, maximizes hot water output
- Made from State PEXAN™, a cross-linked polymer that can withstand long-term exposure to temperatures up to 400°F

Easy-to-Light Piezo Ignitor

- For fast “one-hand” pilot ignition

Glass-Lined Tank with Aluminum Anode Rod

- For long-lasting protection against rust and corrosion

Durable Brass Tamper-Resistant Drain Valve

Factory-Installed Temperature & Pressure (T&P) Relief Valve

Design-Listed by CSA International

- Certified at 300 PSI test pressure and 150 PSI working pressure
- Listed according to ANSZ21.10.1-CSA 4.1 standards governing storage-type water heaters
- Additional code compliance: UBC, CEC, SBCC, CABO, HUD, BOCA National Codes and 2004 NAECA

6-Year Limited Tank and Parts Warranty

- Consult written warranty or contact State Water Heaters for complete information



For more information on Select® contact:
State Water Heaters
500 Tennessee Waltz Parkway, Ashland City, TN 37015
800-365-0024 Toll-free USA
www.statewaterheaters.com

SOLID.STATE.




SELECT®

Residential Gas Water Heaters



MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GALLON CAPACITY	BTU INPUT PER HOUR NATURAL	RECOVERY 90 F RISE GALLONS	R VALUE	DIMENSIONS IN INCHES							APPROX. SHIPPING WEIGHT (LBS)
							A	B	C	D	E	F	DRAFT HOOD OUTLET	
TALL MODEL														
GS6 50 YRRAT	87	0.58	50	50,000	51	8	60-3/4	57-1/2	20	13	8	50-1/2	4	148
SHORT MODELS														
GS6 30 YBRA	54	0.61	30	30,000	30	8	49	45-3/4	18	13	8	39	3	99
GS6 40 YBRA	67	0.59	40	40,000	40	8	52-1/4	49	20	13	8	42-1/4	3	122

Recovery capacity based on actual performance tests.
 Water Connections - 3/4" on all models.
 Internal Heat Traps (factory installed)
 Pex-Lined Nipples (factory supplied)

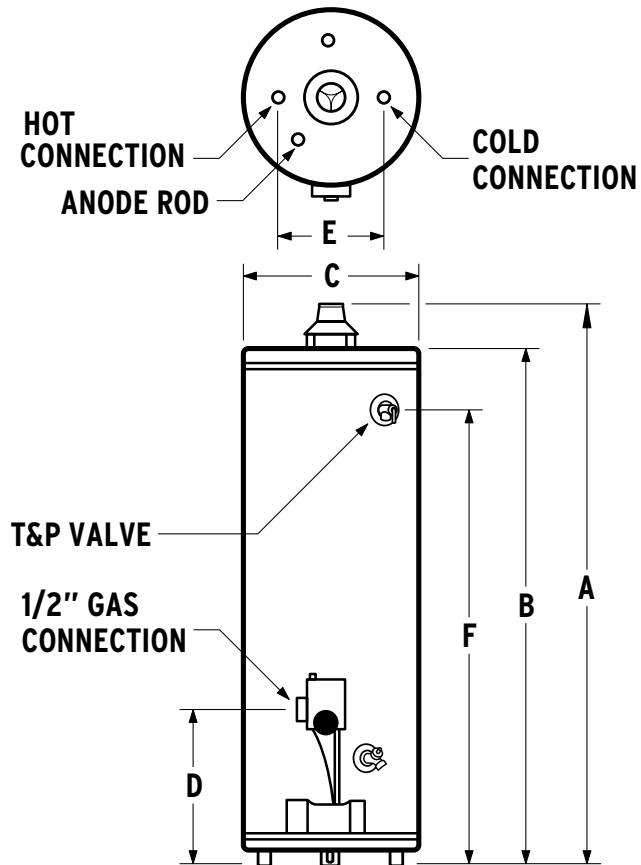

Maximum Hydrostatic Working Pressure: 150 PSI.

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For more information on Select® contact:
 State Water Heaters
 500 Tennessee Waltz Parkway, Ashland City, TN 37015
800-365-0024 Toll-free USA
www.statewaterheaters.com

SOLID.STATE.

