



Residential Gas Water Heaters

HIGH EFFICIENCY FLUE DAMPER

ENERGY STAR® QUALIFIED AUTOMATIC FLUE DAMPER

- Increases efficiency as it automatically opens and closes to reduce heat loss in the standby mode.

ELECTRONIC GAS CONTROL

- Intelligent control logic provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performance.

DIAGNOSTICS

- The electronic gas control incorporates an LED status indicator that monitors system operation and service diagnostics.

ELECTRONIC IGNITION

- Heater operates with an automatic pilot relight system that shuts off the pilot during stand-by modes to reduce gas consumption and eliminates nuisance pilot outage issues associated with standing pilot models.

POWER REQUIREMENTS

- Plugs into standard 110/120v outlet (10 foot power cord included).

DYNACLEAN™ DIFFUSER DIP TUBE

- Reduces lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J.

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.

ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a ¼ turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.

BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes.
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/ IENSA 90.1.
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act, (EPCA), as amended.

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 PSI test pressure and 150 PSI working pressure. Listed according to ANSI Z21.10.1 - CSA 4.1 standards governing storage tank-type water heaters.

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com.



SOLID. STATE.






Residential Gas Water Heaters

Model Number	Gallon Capacity	First Hour Rating Gallons	Energy Factor (EF)	BTU Input Gallon Per Hour Natural*	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches								Approx. Shipping Weight (lbs)
						Foam Thickness	A	B	C	D	E	F	Draft Hood Outlet	
Tall Models														
GS6 40 YBFT	40	67	0.67	40,000	42	2	64-1/4	58-1/4	20	13	8	51-3/4	3 or 4	152
GS6 50 YBFT	50	81	0.67	40,000	42	2	63-1/2	57-1/4	22	13	8	50-1/4	3 or 4	167
Short Models														
GS6 40 YBFS	40	67	0.67	40,000	42	2	54	47-3/4	22	13	8	41	3 or 4	149
*GS6 50 YBFS	50	88	0.67	40,000	42	2	55-3/4	49-1/2	24	13-1/4	8	42-1/2	3 or 4	175

Recoveries are rounded to nearest gallon.
 Water Connections - 3/4" on all models.
 External heat trap nipples are factory-installed on all models.
 When ordering top-mounted T&P Valve, add "G" to model number (GS6 40 YBFT G).
 All models are certified from sea level to 10,100 ft. elevations.
 *Propane (LP) gas - 37,000 BTU input for 50-gallon tall model and 36,000 BTU for 40-gallon models.
 50-gallon short model not available in LP gas.

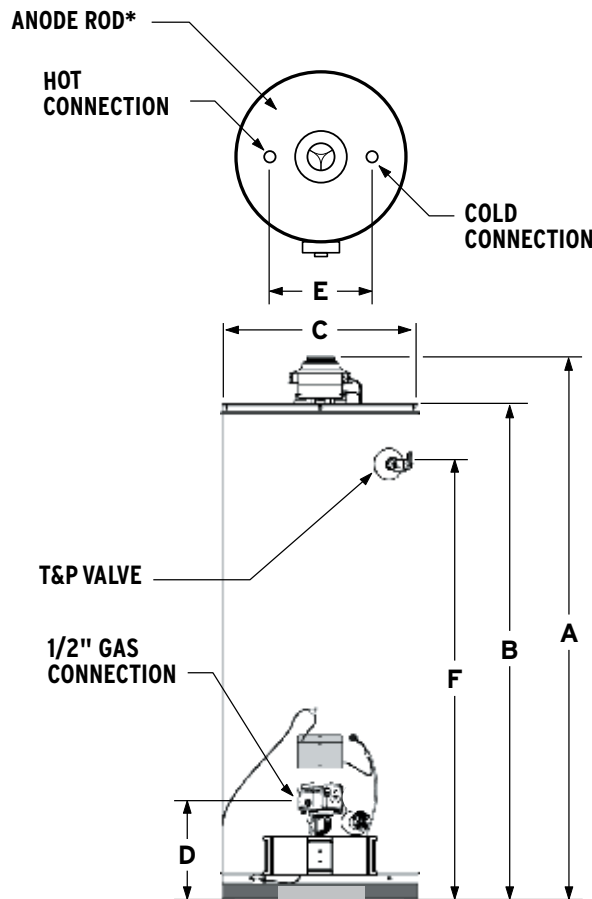

FOR MORE INFORMATION ON SELECT® CONTACT: STATE WATER HEATERS 500 TENNESSEE WALTZ PARKWAY, ASHLAND CITY, TN 37015 • 800-365-0024 TOLL-FREE USA • STATEWATERHEATERS.COM