


LEGEND

SCT-199 - THREE WATER HEATERS, DIRECT PLUMBING WITH NO RECIRCULATION

WARNING: THIS DRAWING SHOWS SUGGESTED PIPING CONFIGURATION AND OTHER DEVICES; CHECK WITH LOCAL CODES AND ORDINANCES FOR ADDITIONAL REQUIREMENTS.

DRAWING SHOWS INDOOR UNITS. OUTDOOR UNITS ARE PIPED IN THE SAME MANNER.

→	TEMPERATURE & PRESSURE RELIEF VALVE	BALL VALVE	 COLD
<u></u>	PRESSURE RELIEF VALVE	TEMPERATURE GAUGE	 НОТ
	CIRCULATING PUMP	CHECK VALVE	 BUILDING RETURN
\Diamond	TEMPERATURE CONTROL PROBE	WATER FLOW SWITCH	 GAS
<u></u>	DRAIN		

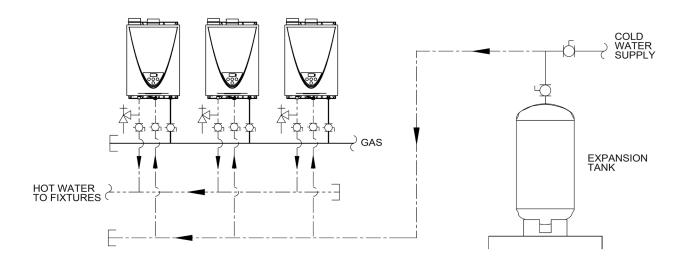

NOTES:

- 1. Installation of a device to minimize scale deposits, such as the Product Preservers®, water softener, etc. should be considered. Refer to the heater's installation manual for additional information and/or consult with a local water quality expert.
- 2. Gas supply line shall be sized per the heater's installation manual and the current edition of ANSI Z223.1/NFPA 54.