

# TANKLESS HIGH EFFICIENCY CONDENSING OUTDOOR MODELS



**GTS-520-NEH  
GTS-520-PEH**



ANSI Z21.10.3

CSA 4.3

## FEATURES

**Condensing Technology  
Provides Significant Energy  
Cost Savings**

**Primary Heat Exchanger  
is Constructed of HRS35  
Commercial-Grade Copper**

- Stronger than standard copper and more resilient against erosion

**Secondary Heat Exchanger  
is Made of Type 316L  
Stainless Steel**

- Provides additional protection against corrosion

**Continuous Maximum Flow  
Rates up to 9.0 GPM**

**Can be Used for Both  
Residential and Light  
Commercial Applications**

**ENERGY STAR® Qualified**

**Easy-Link Up to 4 Units**

- With no additional parts or accessories needed

**Outdoor Models include  
Remote Control as a  
standard feature**

**Indoor Models include both  
a Remote Control and  
Power Cord as standard  
features**

**Electronic Ignition-  
No Pilot Light**

**Built-In Display Shows  
Operating Temperature  
Along with Diagnostic and  
Error Codes**

**Low NOx Emissions**

**Complies with Lead  
Plumbing Law**

**Safety Features:**

- Air-Fuel Ratio (AFR) Sensor
- Exhaust & Water Temperature Safety Control
- Overheat Cutoff Fuse

**Internal Freeze  
Protection System**

**Accessories**

- Remote Temperature Controller
- Pipe Cover
- Neutralizer Kit
- Plumbing Installation Kits

**Warranty**

- 12-year limited warranty on heat exchanger in residential applications
- 5-year limited warranty on heat exchanger in commercial applications
- 5-year warranty on all parts

For more information on Tankless Condensing Units, contact:

State Water Heaters  
500 Tennessee Waltz Parkway  
Ashland City, TN 37015  
1-877-737-2840 Toll-free USA  
www.statewaterheaters.com


**SOLID.STATE.**




# OUTDOOR CONDENSING MODELS

MODEL NUMBER	FUEL TYPE	GAS CONSUMPTION INPUT		INLET GAS PRESSURE		ENERGY FACTOR	HOT/COLD GAS CONN.	DIMENSIONS IN INCHES			APPROX. SHIPPING WEIGHT (LBS)
		MINIMUM BTU/H	MAXIMUM BTU/H	MINIMUM W.C.	MAXIMUM W.C.			HEIGHT	WIDTH	DEPTH	
GTS-520-NEH	Natural	13,000	199,000	5.0	10.5	0.91	3/4" NPT	25-3/5	18-1/2	12-2/5	73
GTS-520-PEH	Propane	13,000	199,000	8.0	14.0	0.91	3/4" NPT	25-3/5	18-1/2	12-2/5	70

All dimension in inches.  
15-150 psi Water Pressure. 40 psi or above recommended for maximum flow.

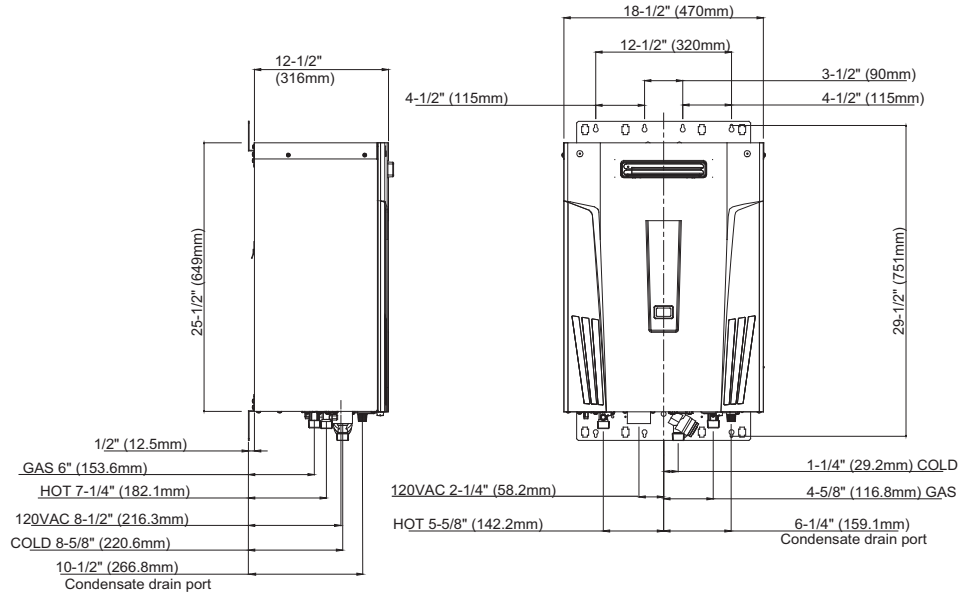

**CLEARANCES:** Top: 36"; Bottom: 12"; Front: 24"; Back: .05"; Sides: 3"

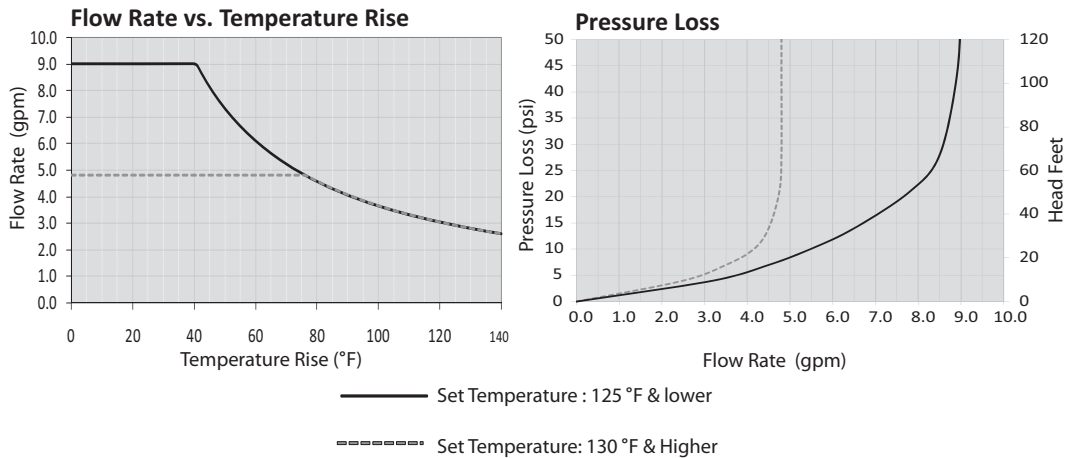

For complete information on limited warranties, consult written warranty or contact technical support at 1-877-737-2840.

State Industries, Inc., reserves the right to make product changes or improvements without prior notice.

For more information on Tankless Condensing Units, contact:

State Water Heaters  
500 Tennessee Waltz Parkway  
Ashland City, TN 37015  
1-877-737-2840 Toll-free USA  
www.statewaterheaters.com

**SOLID.STATE.**

