RESIDENTIAL

### SELECT<sup>®</sup> DAIRY BARN Self-Cleaning Electric Water Heater



This 80-gallon electric water heater is equipped with two heating elements, with thermostats that are adjustable up to 180°F, to provide sanitizing hot water required in a dairy barn environment. It is also shipped with a base with 4" legs, to raise the water heater off the floor to simplify and maintain sanitary conditions.



### Self-Cleaning Turbo Coil Dip Tube



- Designed with jet ports that direct incoming cold water to create turbulence and reduce sediment buildup in the tank
- Reduced sediment buildup helps prolong tank life and maximizes high energy-efficiency
- Made from State PEXAN <sup>TM</sup>, a cross-linked polymer that can withstand long-term exposure to temperatures up to 400°F

## Two 4500-Watt Heating Elements, Each with 180°F Thermostat

- Elements are available non-simultaneous or simultaneous with off-peak metering as demanded by zone requirements
- 180°F thermostat allows hot water sanitization

#### Glasslined Tank with Two Anode Rods

• Provides maximum protection against corrosion

#### 2"-Thick (R-16) Foam Insulation for High Energy-Efficiency

#### **Durable Brass Tamper-Resistant Drain Valve**

#### Certified and Rated T&P Relief Valve

**Code Compliance:** Meets the Federal Minimum Energy Standards according to the latest edition of the National Appliance Energy Conservation Act (NAECA). Also complies with ASHRAE 90.1-2004 and Current Editions of ICC Codes and HUD Standards.

#### **3-Year Limited Tank Warranty, 1-Year Limited** Parts Warranty

• Consult written warranty or contact State Water Heaters for complete information

For more information on Select<sup>®</sup> contact: State Water Heaters 500 Tennessee Waltz Parkway, Ashland City, TN 37015 800.365.0024 Toll-free USA www.statewaterheaters.com

SOLID. STATE.



SRESS00406

October 2012R

Page 1 of 2

©2012 State Water Heaters

#### RESIDENTIAL

00

# SELECT<sup>®</sup> DAIRY BARN






MODEL NUMBER	FIRST HOUR RATING (GALLONS)	GALLON Capacity	STANDARD Element Wattage* 240 Vac	RECOVERY 90°F RISE GALLONS PER HOUR	R VALUE	DIMENSIONS IN INCHES			APPROX.
						Α	В	C	SHIPPING WEIGHT (LBS)
PE 82 20DT	86	80	4500	21	16	67-1/2	60	24	210

Inlet and outlet connections: 3/4"

Single-element models not available on dairy barn models.

This model uses 1" screw-in elements. \*Maximum element wattage 6000 watts

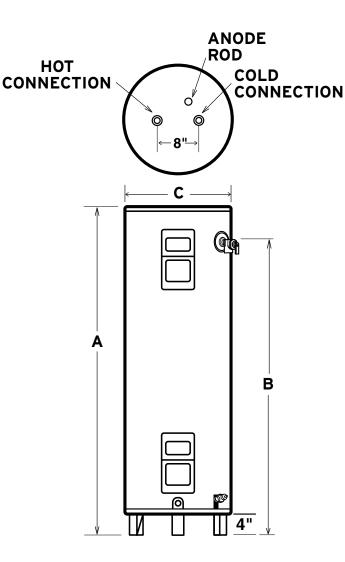

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

